

BA-08

Single banknote acceptor



Product Features

- Financial industrial standard
- Full surface CIS scanning
- Two pairs of belts in transportation
- High performance processor
- Multiple magnetic detection lines
- Note serial NO. record (optional)

BA-08 adopts leading anti-counterfeit technology , such as whole wide CIS detection , multiple-line of magnetic detection and note serial number detection . BA-08 meets financial industrial standard of ECB . It uses high performance processor and features the leading cash processing speed . Two pairs of belts are used in transport unit , which ensure more smooth transportation of old , soft and worn notes .



Mass transit



Retail industry



Parking lot



Casino

BA-08

Single banknote acceptor

Performance

Effective Validation

- First acceptance rate > 99%
- Complied with financial industrial standard
- High processing speed < 2.5 s/note
- Full surface CIS detection & multiple-line of magnetic detection effectively resist counterfeit.

Security and Reliability

- Anti-stringing design prevents fraudulence.
- Impact-resistant cash vault ensures cash security.
- Software online upgrading rapidly embarks on latest counterfeit.


Compact Structure

- Highly compact structure effectively saves space.

Low Maintenance Cost

- Enclosed transport unit effectively prevents dust, adapts to harsh environment
- Cash vault is designed with sight glass to find out bill jam.
- Solve bill jam in need of no professional tools
- Industrial part features long service life

Outline Dimension Drawing (Unit: mm)

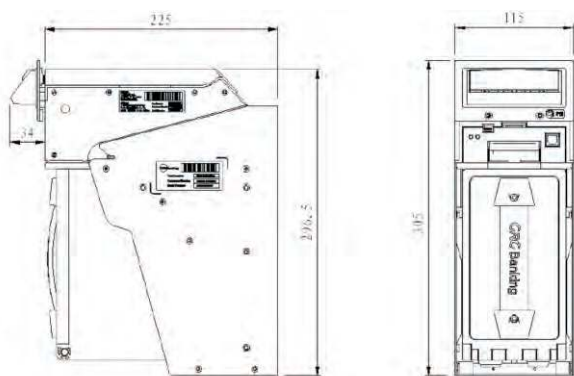

Specifications

Bill Insertion

- Lengthwise insertion with 4 ways.

Detection

- Full surface CIS detection & multi-line magnetic detection
- Banknote serial NO. tracking (optional)

Denominations and Dimensions

- Simultaneously accepts 100 denominations.
- Length range: 120~170 mm;
- Width range: 62~85 mm.
- Thickness range: 0.06~0.18 mm

Capacity

- 1000 notes for cash vault
- 1 note for escrow

Maintenance Direction

- Front access

Power Supply

- DC12V-28V, 3A (maximum)

Communication Interface

- RS-232 or USB

Weight

- Total: 4.5 kg
- Vault: 1 kg

Environment

- Working temperature: 0°C~50°C
- Working humidity: 20%~90%RH

MCBF


- 100,000 cycles



Multiple detection ways



Easy solution of bill jams

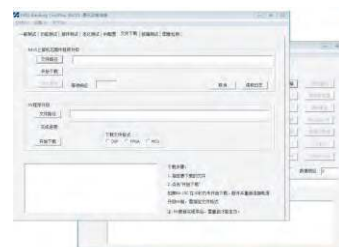

Online software upgrading

Note : In case the specifications be upgraded, you may as well contact with us to get the latest information.
 The picture shall be taken as a reference. The product appearance depends on goods.

GRGBanking Equipment Co., Ltd.

Address : 9 Kelin Road, Luogang District, Guangzhou, China 510663

Sales TEL : (+86) 13824405009

E-mail : oem@grgbanking.com