

CAM 8350

Bundle Cash & Check Deposit Module



Description

The CAM 8350 module is capable of accepting banknotes and checks via a single slot. Its cutting-edge bundled media acceptance technology, plus its outstanding availability and reliability make it a robust system for the countries where check processing through self-service channel is required.

CAM 8350

Bundle Cash & Check Deposit Module

For Banks:

- Significant reduction in cost of manual processing in the back office
- Cost-effective for paper and documents/checks transport
- More secure through reductions in manual manipulation
- Higher employee productivity with time saved for value-added customer service
- Less time intensive for tellers, longer banking hours for customers

For Customers:

- Enhanced banking experience through fast and user-friendly transaction interface
- Extending check deposit transactions outside business hours
- More secure through bundled deposit into a protected system

Specification

Validation

- Double-side full face Contacted Image Scan
- Magnetic detection
- Full face thickness detection (opt.)
- Infrared and visible light detection
- Recognize up to 128 different denominations
- MICR (Magnetic Ink Character Recognition) reader support E13B and CMC-7 mode

Image Capture System

- Image output: support 2 bit black and white, 8 bit gray, 24 bit true color image
- Image format: 200 dpi BMP/JPG/TIF

Endorsement

- Support ASCII standard
- Printing height 2.5mm, max 4 lines, with 20 characters in each line.
- 9 pin 7x7 matrix printer, horizontal printing
- Mechanical replaceable stamp (optional)

Features

- Supports long-wide cash and check deposit
- Support check image printing and endorsement (with optional stamp)
- Dynamic deskew mechanism
- Software online upgrading
- Offline Diagnosis System (ODS)

GRGBanking Equipment Co., Ltd


Add: 9 Kelin Road, Science City, Luogang District, Guangzhou, China 510663
Tel: +86 20 6287 9763
Fax: +86 20 6287 9976
Email: oem@grgbanking.com

Copyright by GRGBanking Equipment Co., Ltd.
All rights reserved@201508

Technical Data

Item	Specification	
Process Speed	6 notes / sec, 1 check / sec	
Recognition Support	Support paper and polymer note, up to 128 denominations	
Banknote Size & Thickness	L: 120mm-185mm W: 60mm-85mm T: 0.08mm-0.15mm	
Check Size & Thickness	L: 120mm-225mm W: 60mm-93mm T: 0.08mm-0.15mm	
Maximum Cash (Check) / transaction	Cash deposit only: 100 Check deposit only: 50 Cash and check mixed deposit: 50	
Capacity	Escrow	100 notes 50 checks or mixed
	Stack cassette	2,000 pcs / cassette 2 cassettes
	Counterfeit notes bin	50 notes
	Reject Bin	100 notes
Weight	69kg(no cassette) / 76kg(include 2 cassettes)	
Communication Interface	RS232, USB (optional)	
Power Supply	36V±5%, +10A	
Operation Environment	Temperature: 0-50 C Working humidity: 20%-95%	

Dimensions

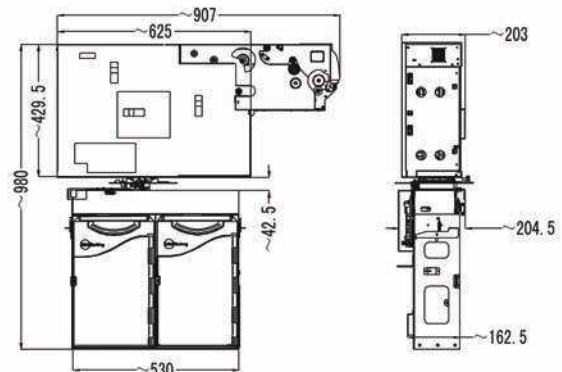

Specifications are subject to update without prior notice. Please consult GRGBanking or its representative for the latest information.