

TAM-00X

Ticket acceptance module with high speed and reliability

Product feature

- High acceptance speed
- Ticket jam detection
- Stainless steel ticket box
- Friendly maintenance
- Smooth transportation
- Ticket box equipped with RFID



Based on the design concept of high security , high efficiency and high reliability , TAM series modules focus on ticket acceptance in the situation of large passenger flow . TAM series modules accept in high speed the tickets in compliant with standard ISO/IEC 7810 . Each ticket box inside module is equipped with lock and RFID to ensure ticket security . TAM series modules can surely meet your application demands.



Metro



Highway



BRT



Parking lot

TAM-00X

Ticket acceptance module(card)

Performance

Security and Reliability

- Entrance shutter prevents the insertion of foreign objects
- Automatic passage clearance and ticket pile adjustment avoid ticket jams
- Ticket box status detection and informing
- Contactless electronic tag on the box support status record and inquiry function
- Stainless steel ticket box with double locks ensure high security and durability
- Invalid tickets will be rejected to avoid ticket sorting


Efficiency

- High acceptance speed of 1 second per ticket meets the demand of fast transaction
- 2 ticket boxes with large capacity of 1000 tickets lowers ticket box replacement frequency and maintenance cost

Maintenance

- Less quick-wear parts and longer service life
- Withstand harsh working environment
- Solve ticket jams in need of no professional tools

Outline Dimension Drawing (Unit: mm)

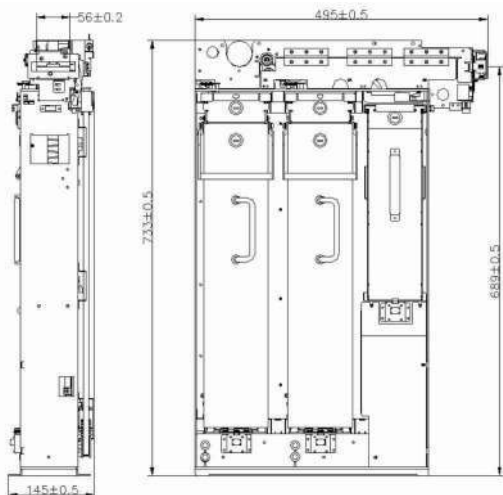

Note : In case the specifications be upgraded, you may as well contact with us to get the latest information. The picture shall be taken as a reference. The product appearance depends on goods.

Specifications

Acceptance Speed

- ≤1s per ticket (including 0.3s for ticket reading)

Ticket Dimensions

- Length : 85.5±0.2mm
- Width : 54±0.2mm
- Thickness : 0.5±0.05mm(0.3~0.8mm adjustable)

Capacity

- 1000 tickets (0.5-mm-thick) ×2
- Reject bin : 300 tickets

Power Supply

- DC 24V±10% , 48W

Communication Interface

- RS-232

Weight

- 28kg

Environment

- Working temperature : 0°C ~ 50°C
- Working humidity : 20% ~ 90%RH

MCBF

- 100,000 cycles



Design with high reliability



High acceptance speed



Large capacity

GRGBanking Equipment Co., Ltd.

Add: 9 Kelin Road, Science City, Luogang District, Guangzhou, China 510663
 Tel: +86 20 6287 9763
 Fax: +86 20 6287 9976
 Email: oem@grgbanking.com

Copyright by GRGBanking Equipment Co., Ltd.
 All rights reserved@201605

Specifications are subject to update without prior notice. Please consult GRGBanking or its representative for the latest information.

www.GRGBanking.com