

TIM-00X

Ticket issuing module with high speed and reliability

Product features

- High issuing speed
- Transport unit detection and management
- Ticket box with high reliability and security
- Friendly maintenance



Based on the design concept of high security , high speed and high reliability , TIM series modules focus on ticket issuing in the situation of large passenger flow . TIM issues in high speed the tickets in compliant with IEC/ISO7810 and rejects invalid tickets . Intelligent detection of transport unit and lock&RFID on ticket box ensure high security of module application . TIM series module will surely meet your application demands .



Metro



Highway



BRT



Parking lot

TIM-00X

Ticket issuing module(card)

Performance

Security and Reliability

- Available to tickets of various levels of oldness with less wear to tickets
- Automatic transport unit clearance in the ticket jamming incident
- Intelligent detection and informing of ticket status in ticket box
- RFID on ticket box supports status record and inquiry
- Durable stainless steel ticket box with double locks
- Invalid tickets rejection function avoids conflicts during transaction


Efficiency

- High issuing speed of 1 ticket per second meets the demand of fast transaction
- 2 ticket boxes with large capacity of 1000 tickets lowers the frequency of ticket loading and maintenance cost

Friendly Maintenance

- Less quick-wear parts and longer service life
- Withstand harsh working environment
- Solve ticket jams in need of no professional tools

Outline Dimension Drawing (Unit: mm)

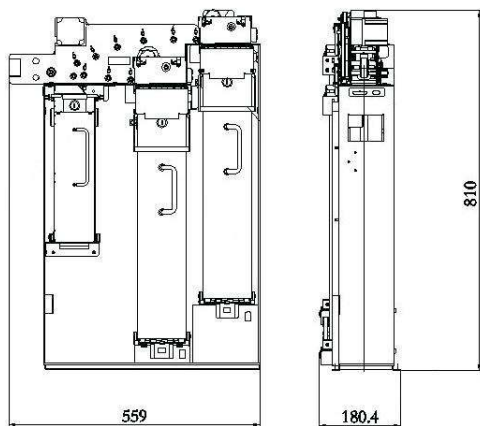

Specifications

Issuing Speed

- $\leq 1s$ per ticket (including 0.3s for ticket reading)

Ticket Dimension

- Length : $85.5 \pm 0.2mm$
- Width : $54 \pm 0.2mm$
- Thickness : $0.5 \pm 0.05mm$ (0.3~0.8mm adjustable)

Capacity

- 1000 tickets (0.5-mm-thick) $\times 2$
- Reject bin : 300 tickets

Power Supply

- DC 24V $\pm 10\%$, 85W (maximum)

Communication Interface

- RS-232

Weight

- 35kg

Environment

- Working temperature : 0 $^{\circ}C$ ~ 50 $^{\circ}C$
- Working humidity : 20%~90%RH

MCBF

- 100,000 cycles



Design with high reliability



Available to various tickets



Online software upgrading

Note : In case the specifications be upgraded, you may as well contact with us to get the latest information.
 The picture shall be taken as a reference. The product appearance depends on goods.

GRGBanking Equipment Co., Ltd.

Add: 9 Kelin Road, Science City, Luogang District, Guangzhou, China 510663
 Tel: +86 20 6287 9763
 Fax: +86 20 6287 9976
 Email: oem@grgbanking.com

Copyright by GRGBanking Equipment Co., Ltd.
 All rights reserved@201605

Specifications are subject to update without prior notice.
 Please consult GRGBanking or its representative for the latest information.

www.GRGBanking.com